

Name	<b>CAST HAMMERED ROOF</b> Pierced shade sheds decorative patterned light over shrubs, gardens, or walkways. Coordinates with matching deck light 15063.	<b>6" DOME PATH LIGHT</b> A popular look has a new addition with a smaller 6" shade. Coordinates with our 15310 & 15410 Domed Roof series.
Ordering Guide	15471 TZT - Textured Tannery Bronze, Aluminum 15471 BBR - Bronzed Brass, Brass	15470 AZT - Textured Architectural Bronze 15470 BKT - Textured Black 15470 BE - Beach 15470 BBR - Bronzed Brass
Housing	Cast Aluminum, Cast Brass	Cast Aluminum, Cast Brass
Finish	Bronzed Brass or Textured Tannery Bronze	Textured Architectural Bronze, Bronzed Brass, Textured Black, Beach
Light Source	12V Incandescent S-8 wedge base socket	12V Incandescent T-5 wedge base socket
Power Usage at 12V AC Input VA & Watts	VA MAX: 24.4-W(VA) Supplied: 24.4-W(VA) 3156K (15598CLR) Optional: 18.5-W(VA) 3155K (15599CLR)	VA MAX: 16.25-W(VA) Supplied: 16.25-W(VA) 921X (17025) Optional: 11.6-W(VA) 921X (17023)
Wiring	35" of useable #18-2, SPT-2W leads. Cable connector supplied.	24" of useable #18-2, SPT-2W leads. Cable connector supplied.
Mounting Accessories Included	8" In-ground stake	8" In-ground stake
Optional Mounting Accessories	15601 - Surface Mounting Flange 15607 - Surface Mounting Bracket	15601 - Surface Mounting Flange 15607 - Surface Mounting Bracket
LED Option	Yes, 15871	Yes, 15870



What means to you!  
**“Powered by Design Pro LED Technology”**

Professional grade LED lighting and systems components, designed and engineered for optimum all-weather performance with warm, natural lighting affects.





Design Pro LED & INCANDESCENT PATH LIGHTS

The result is an extremely efficient, state-of-the art LED fixture that delivers a pure, warm white light and the right amount of lumens to enhance any exterior design – and illuminate your specific application the way it was intended.

For your clients, LED offers long-term cost savings since the fixtures use 75% less electricity than traditional low voltage lighting. Plus, our complete Landscape Lighting collection features an extensive selection that allows you to reap the benefits of LED on any outdoor landscape lighting job.

See our complete line of professional grade landscape lighting at:  
[www.landscape-lighting.com](http://www.landscape-lighting.com)

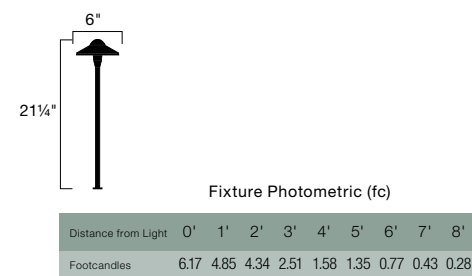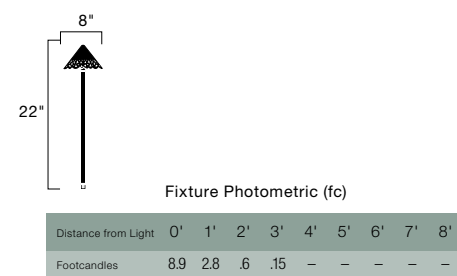



DESIGN PRO LED PATH & SPREAD LOW VOLTAGE




Name	LED CAST HAMMERED ROOF	LED FUNDAMENTALS	LED DOME PATH LIGHT
	Pierced shade sheds decorative patterned LED light over shrubs, gardens, or walkways. Coordinates with matching deck light 15763.	Basic, uncomplicated design for versatility. Use along walkways or points of interest. Now with a thicker gauge shade, making this proven look even more substantial.	Now in Design Pro LED, a wider path and spread light that is unobtrusive in the landscape. Coordinates with the 15811 and 15870 path and spread fixtures.
Ordering Guide	15871 TZT - Textured Tannery Bronze, Aluminum 15871 BBR - Bronzed Brass, Brass	15839 TZT - Textured Tannery Bronze, Brass 15839 CO - Unfinished Copper, Copper	15810 AZT - Textured Architectural Bronze 15810 BKT - Textured Black 15810 BE - Beach 15810 BBR - Bronzed Brass
Housing	Cast Aluminum, Cast Brass	Brass or Copper	Cast Aluminum, Cast Brass
Finish	Bronzed Brass or Textured Tannery Bronze	Unfinished Copper or Textured Tannery Bronze	Textured Architectural Bronze, Bronzed Brass, Textured Black, Beach
Light Source	Integrated LEDs and Driver, 2950K +/- 150	Integrated LEDs and Driver, 2950K +/- 150	Integrated LEDs and Driver, 2950K +/- 150
Power Usage at 12V AC Input VA & Watts	5.8 VA, 4 W Multiply fixture VA by the number of fixtures used to determine size of transformer	5.8 VA, 4 W Multiply fixture VA by the number of fixtures used to determine size of transformer	5.8 VA, 4 W Multiply fixture VA by the number of fixtures used to determine size of transformer
Operating Voltage Range	9V - 15V AC/DC	9V - 15V AC/DC	9V - 15V AC/DC
Wiring	55" of useable #18-2, SPT-2W leads. Cable connector supplied.	55" of useable #18-2, SPT-2W leads. Cable connector supplied.	30" of useable #18-2, SPT-1W leads. Cable connector supplied.
Mounting Accessories Included	8" In-ground stake	8" In-ground stake	8" In-ground stake
Optional Mounting Accessories	15601 - Surface Mounting Flange 15607 - Surface Mounting Bracket	15601 - Surface Mounting Flange 15607 - Surface Mounting Bracket	15601 - Surface Mounting Flange 15607 - Surface Mounting Bracket
Incandescent Option	Yes, 15471	Yes, 15439	Yes, 15310


DESIGN PRO LED PATH & SPREAD LOW VOLTAGE



Name	LED 6" DOME PATH LIGHT	LED GLASS & METAL	LED DOME PATH LIGHT - SHORT STEM
	A popular look has a new addition with a smaller 6" shade and is available in LED. Coordinates with our 15810 & 15811 LED Domed Roof series.	A sleek, modern original that combines contemporary style with smooth LED illumination.	A popular version of our LED 15810 designed for use in lower planting and smaller garden areas.
Ordering Guide	15870 AZT - Textured Architectural Bronze 15870 BKT - Textured Black 15870 BE - Beach 15870 BBR - Bronzed Brass	15817 AZT - Textured Architectural Bronze 15817 BN - Brushed Nickel	15811AZT - Textured Architectural Bronze 15811 BE - Beach
Housing	Cast Aluminum, Cast Brass	Aluminum (AZT) or Brass (BN) with glass diffuser	Cast Aluminum
Finish	Textured Architectural Bronze, Bronzed Brass, Textured Black, Beach	Textured Architectural Bronze or Brushed Nickel	Textured Architectural Bronze or Beach
Light Source	Integrated LEDs and Driver, 2950K +/- 150	Integrated LEDs and Driver, 2950K +/- 150	Integrated LEDs and Driver, 2950K +/- 150
Power Usage at 12V AC Input VA & Watts	5.8 VA, 4 W Multiply fixture VA by the number of fixtures used to determine size of transformer	5.8 VA, 4 W Multiply fixture VA by the number of fixtures used to determine size of transformer	5.8 VA, 4 W Multiply fixture VA by the number of fixtures used to determine size of transformer
Operating Voltage Range	9V - 15V AC/DC	9V - 15V AC/DC	9V - 15V AC/DC
Wiring	30" of useable #18-2, SPT-1W leads. Cable connector supplied.	30" of useable #18-2, SPT-1W leads. Cable connector supplied.	36" of useable #18-2, SPT-1W leads. Cable connector supplied.
Mounting Accessories Included	8" In-ground stake	8" In-ground stake	8" In-ground stake
Optional Mounting Accessories	15601 - Surface Mounting Flange 15607 - Surface Mounting Bracket	15601 - Surface Mounting Flange 15607 - Surface Mounting Bracket	15601 - Surface Mounting Flange 15607 - Surface Mounting Bracket
Incandescent Option	Yes, 15470	Yes, 15317	Yes, 15410

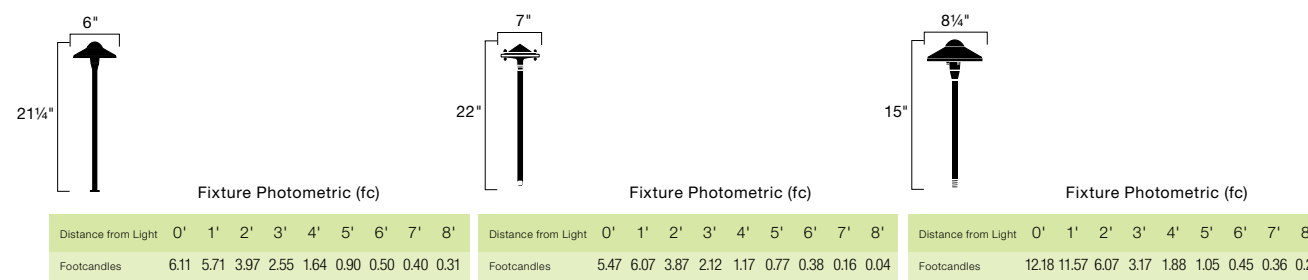

DESIGN PRO LED PATH & SPREAD LOW VOLTAGE

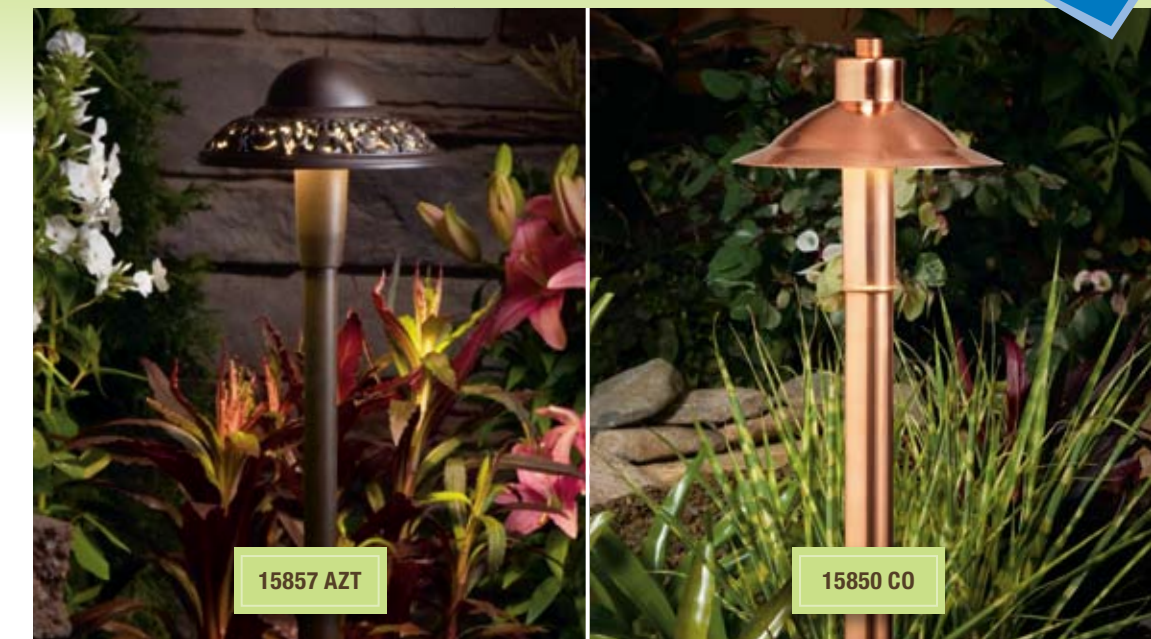

Name	LED PIERCED DOME	LED COPPER HAT
	A cast dome sculpted with a floral band and pierced to reveal a trickle of LED light.	Design Pro LED in a definitive yet unassuming copper housing. Will develop a natural verdigris patina over time.
Ordering Guide	15857 AZT - Textured Architectural Bronze	15850 CO - Unfinished Copper
Housing	Cast Aluminum	Copper
Finish	Textured Architectural Bronze	Unfinished Copper
Light Source	Integrated LEDs and Driver, 2950K +/- 150	Integrated LEDs and Driver, 2950K +/- 150
Power Usage at 12V AC Input VA & Watts	5.8 VA, 4 W Multiply fixture VA by the number of fixtures used to determine size of transformer	5.8 VA, 4 W Multiply fixture VA by the number of fixtures used to determine size of transformer
Operating Voltage Range	9V - 15V AC/DC	9V - 15V AC/DC
Wiring	30" of useable #18-2, SPT-1W leads. Cable connector supplied.	30" of useable #18-2, SPT-1W leads. Cable connector supplied.
Mounting Accessories Included	8" In-ground stake	8" In-ground stake
Optional Mounting Accessories	15601 - Surface Mounting Flange 15607 - Surface Mounting Bracket	15601 - Surface Mounting Flange 15607 - Surface Mounting Bracket
Incandescent Option	Yes, 15457	Yes, 15350

